







● 命名表示 / Ordering Core System

TN120L EFD - A

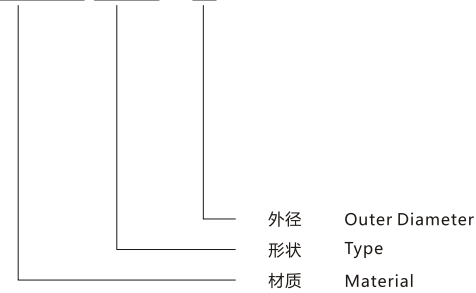

- 适用材质/Available Material : TN120L/ TN140L etc.
- 用途 : LED背光源变压器
Application : LED backlight transformers

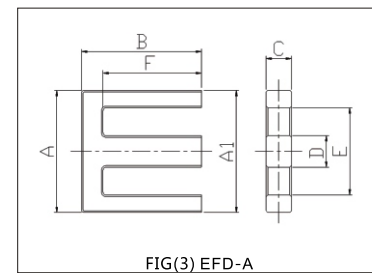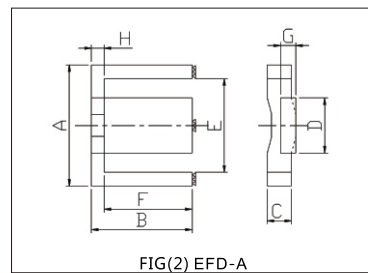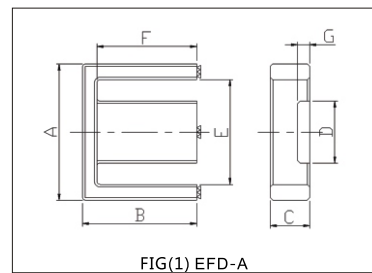


EFD Type Core

| 型号 TYPE | 尺寸 Dimensions (mm) | | | | | | | 图例 FIG |
|------------|----------------------|---------------|------------|----------------|----------|-----------------|---------------|-----------|
| | A1 | B | C | D | E | F | G | |
| EFD-6.4 | 6.4±0.15 | 4.8±0.15 | 4.0±0.15 | 2.0±0.15 | 5.1±0.15 | 3.4±0.15 | 2.65±0.15 | 1 |
| EE-16 | 16.0±0.4 | 12.4±0.3 | 5.1+0/-0.4 | 4.0±0.2 | 11.7min | 10.4±0.3 | | 3 |
| EFD-16.5 | 16.55±0.25 | 19.50±0.25 | 4.45±0.1 | 5.8±.2 | 11.4min | 16.55±0.2/-0.15 | 2.8±0.1 | 1 |
| EFD-22 | 22.0±0.4 | 19.95±0.2 | 4.5±0.15 | 9.4±0.2 | 15.5±0.3 | 16.45±0.15 | 3.2±0.1 | 2 |
| EE-22.4 | 22.4±0.3 | 22.2±0.3 | 4.7±0.2 | 5.8±0.2 | 16.0±0.2 | 18.2±0.2/-0.15 | | 3 |
| EFD-24 | 24.0±0.4 | 18.5±0.25 | 3.8±0.15 | 10±0.2 | 15.9±0.3 | 14.4±0.1 | 3.1±0.15 | 2 |
| EFD-26S | 26.0±0.5 | 24.0+0.3/-0.1 | 4.7±0.2 | 12.2+0.1/-0.15 | 18.4min | 19.9+0.3/-0.1 | 2.7+0.1/-0.15 | 1 |
| EFD-27 | 27.0±0.5 | 25.8±0.2 | 4.8±0.2 | 12.5±0.15 | 19.6±0.5 | 22.1+0.3/-0.1 | 2.8+0.1/-0.15 | 1 |



● 命名表示 / Ordering Core System

TN120L R - A - B - H n - Φ L

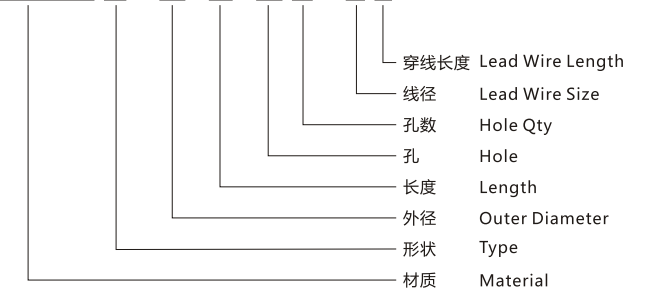

- 适用材质 /Available Material :
TN12B/ TN25H/ TN25Y/ TN40H/ TN80G/ TN100B etc.
- 适用范围 /Application :
产品主要适用于中频变压器、抗流电感、滤波线圈、高性能直流信号传输、滤波信号等
Intermediate Frequency Transformer, Chokeinductor,
Filter Coil, High Performance DC Signal Transmission, Signal Filter etc.

R Type Core

| 型号 TYPE | 尺寸 Dimensions (mm) | | | 图例 FIG |
|------------|----------------------|----------|-----------|-----------|
| | A | B | C | |
| R-1.2-6.8 | 1.20+0-0.2 | 6.80±0.2 | | 1 |
| R-1.25-5.4 | 1.25±0.05 | 5.40±0.1 | 1.00±0.05 | 7 |
| R-1.45-3.3 | 1.45±0.05 | 3.30±0.1 | 1.45±0.05 | 7 |
| R-1.7-6.0 | 1.70±0.1 | 6.00±0.2 | | 1 |
| R-1.9-4.1 | 1.90±0.05 | 4.10±0.1 | | 1 |
| R-2-4.9 | 2.00±0.05 | 4.90±0.2 | | 1 |
| R-2-5.5 | 2.00±0.15 | 5.50±0.2 | | 1 |
| R-2-6.5 | 5.50±0.15 | 6.50±0.2 | | 1 |